SMD
Micro Fuse

Specification

Product	SMD(Micro) Fuse
Type	N6125 C Series
Approved by	
Date	2013. 09. 23.

(주)에스엠 하이테크
SM HI-TECH

Date of Establish : 2013.05.15(Ref. No : N6125 C_Rev.3)

1. Scope

- This specification covers the detail requirements for SMD Micro fuse type of N6125 C Series

2. Classification

- Type designation shall be the following form

* For Example

N	6125	C	E	125
Product Code	Device Type	Fusing Characteristics	Current Rating	Voltage Rating

* T : Time Delay for DC, F : Fast Acting for DC
A : Time Delay for AC, C : Fast Acting for AC

3. Dimensions

- The fuse shall be designed and dimensions in accordance with this figure

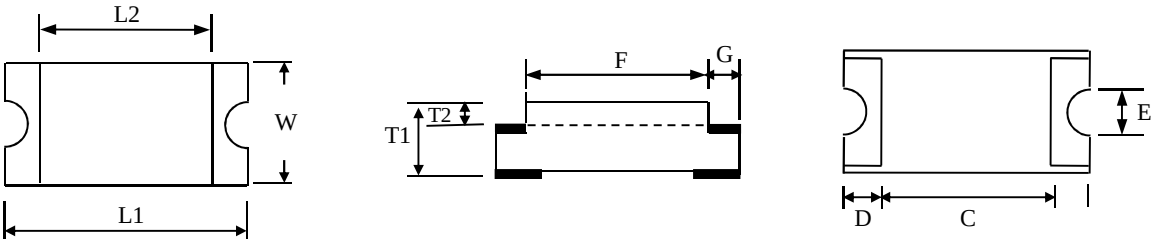

Device Type	Dimensions (mm) ± 0.1mm									
	L1	L2	W	T1	T2	C	D	E	F	G
N6125 C Series	6.1	4.5	2.7	1.2	(0.5)	3.2	1.45	1.5	4.5	0.8

4. Recommended Pad Layouts

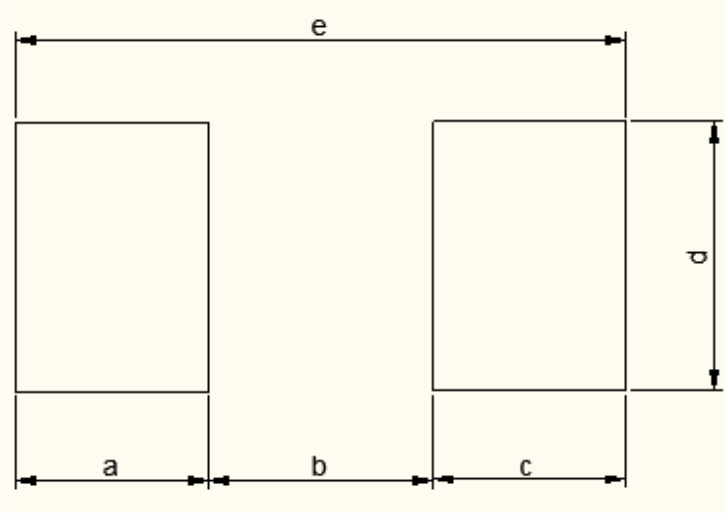

Device Type	Dimensions (mm) ± 0.1mm				
	a	b	c	d	e
N6125 C Series	2.375	2.8	2.375	3.4	7.55

5. Taping dimension

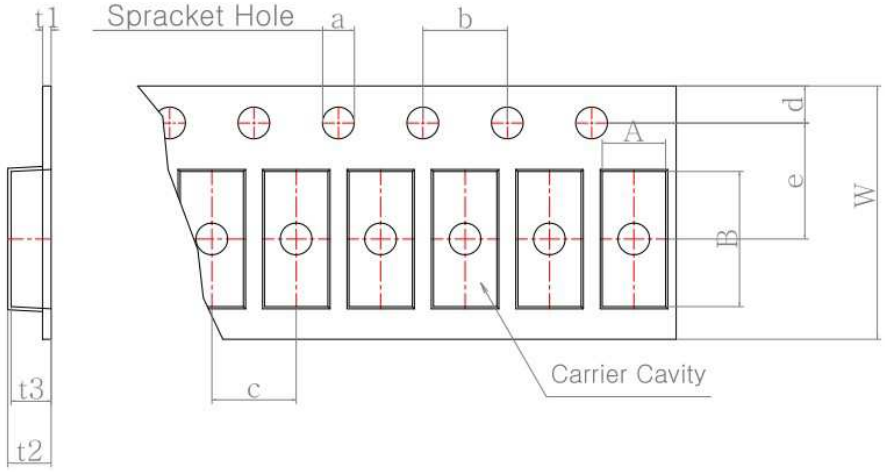

Type	A	B	a	b	c	d	e	t1	t2	t3	W
N6125	3.0 ±0.1	6.4 ±0.1	1.5⌀ 0~+0.1	4.0 ±0.05	4.0 ±0.05	1.75 ±0.1	5.5 ±0.05	0.4 ±0.05	2.06 ±0.05	1.9 ±0.05	PS 12mm

* PS : Polystyrene Tape

6. Ratings

- The rating shall be in accordance with table

Type	Marking	Rated Current	Fusing Time	Rated Voltage	Internal Nominal R(MΩ)	Op.Temp Range	Interrupting Rating (A)	Q'ty /Reel
N6125 C Series (AC)	CC	0.50 A	Open within 5Sec. Max. at 200% of rated Current. Max 0.2 Sec. at 300% of rated Current	125/250VAC	350	-40 ℃ ~ + 125 ℃	UL/CUL 35A KC 125V 50A KC 250V 100A	2500pcs
	CD	0.75 A		125/250VAC	139			
	CD1	0.80 A		125/250VAC	137			
	CE	1.00 A		125/250VAC	78			
	CF	1.25 A		125/250VAC	62			
	CG	1.50 A		125/250VAC	48			
	CG1	1.60 A		125/250VAC	45			
	CH	1.75 A		125/250VAC	39			
	CI	2.00 A		125/250VAC	28			
	CJ	2.50 A		125/250VAC	23			
	CK	3.00 A		125/250VAC	19			
	CL	3.50 A		125/250VAC	16			
	CM	4.00 A		125/250VAC	14			
	CN	4.50 A		125/250VAC	12			
	CO	5.00 A		125/250VAC	10			

- Typical value of fusing time for fast acting type is 100 ~ 1000 m Sec
  Refer to attached Test report

7. Performance Characteristics

Unless otherwise specified, The standard range of condition for test is as follows :
Ambient Temperature : 10℃ - 50℃
Humidity : 45% - 85%

Performance Test Table(1-2)

No	Test Item	Test Condition	Requirement
1	Resistivity Test	• Temp : Ambient • Applied t for 1 hour and 15Min off at 110% of rated current	Duration : 100 Hours (Endurance Test) Measure Voltage drop. Do not exceed 10%
2	Time/Current Characteristic	• Apply 200% of rated current	Fusing Time : Fast acting : 5sec Max Time Delay : 1 – 120 Sec
3	Temperature Rise	• Measure the temperature at surface of device	75℃ Max
4	Cycling Test	• Lower temperature : -40℃ • Upper temperature : +125℃	No. of cycling Time : 5 No Open during Cycling
5	Surge Test	• Apply 135% of rated current with programmable Load On/Off time	No. of Cycling : 30,000
6	Terminal bond strength of the face plating	• JIS C 0051:1994 Sub-clause 7.4.1 (1) Bending value:3mm (Among the fulcrums:90mm) (2)Duration:10s ± 1s	Change of internal resistance: ±3% No evidence of mechanical damage
7	Resistance to soldering Heat	(1) Test by a piece (2) Temp. of solder bath:260℃ ± 5℃ (3) Immersion time: 10s ± 1s (4) After immersion into solder, leaving the room temp. for 1h or more, and then measure the internal resistance	No evidence of appearance damage Electrical characteristics shall be satisfied

No	Test Item	Test Condition	Requirement
7		• Reflow soldering (1) Pre-heating:150℃± 5℃, 120s max (2) Peak: 240℃± 5℃, 10s Max (3) After immersion into solder, leaving the room temp. for 1h or more, and then measure the internal resistance	
8	Solderability	• JIS C 0054:1994 (1) Test by a piece (2) Flux: Rosin-Methanol (3) Temp. of solder: bath:235 ℃± 5℃ (4) Immersion time: 2s ±0.5s	The surface of terminal immersed shall be min. of 95% covered with a New coating of solder
9	Endurance test	(1) Test condition: Nominal ambient Temp. and Relative humidity (2) Test potential: 1. Cycle of 1h "ON" and 15min. "OFF" at 1.05 times rated current for 100 cycles 2. After above the test, 1.25 times rated current for 1h	The voltage drop across the fuse after the test shall not have increased by more than 10% of the value measured before test

8. Derating Curve

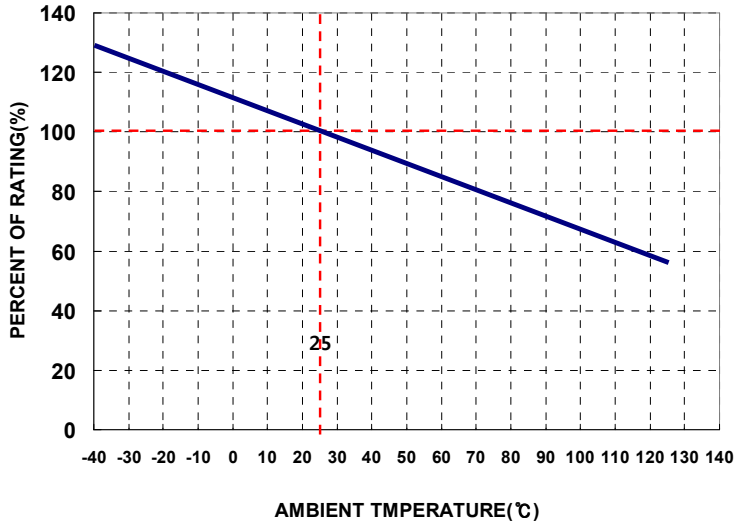

- For operation at ambient temperature in exceed 70℃, The Load shall be derated with Figure
- Normal derating should be 75% Max for all products

9. Time/Current Characteristics

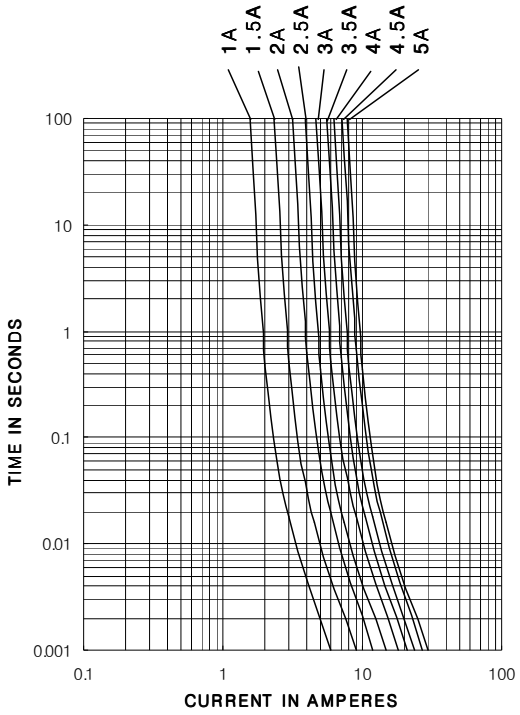

* N6125 C(AC)

10. Reflow condition

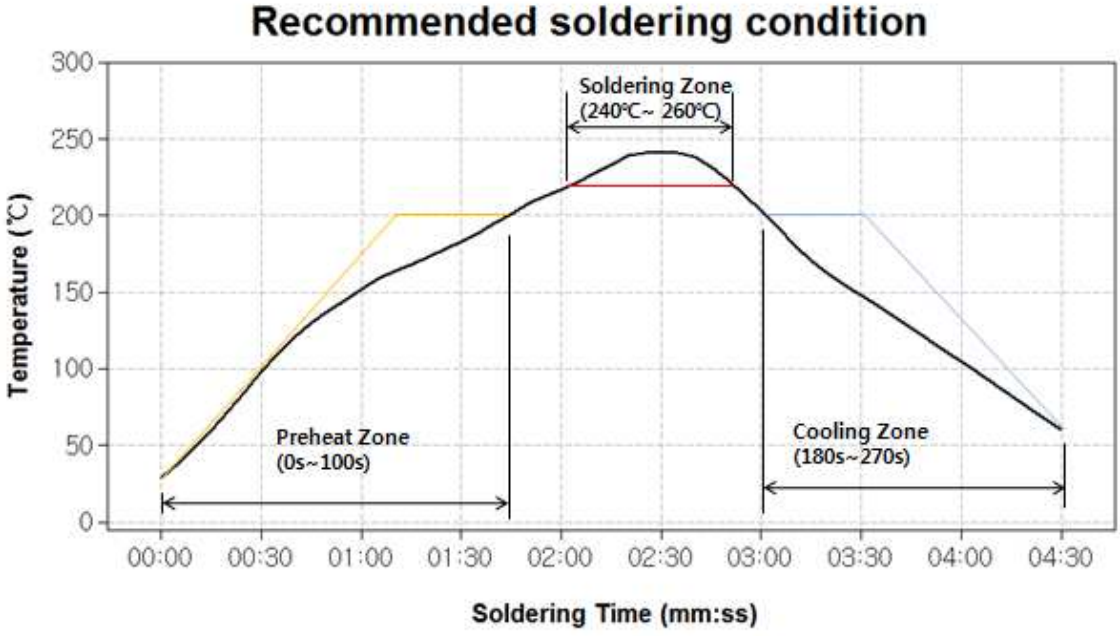

Recommended Re-flow Temp & Speed
Max 260 Degree 0.6m/Minute

● Certification (UL)

File E328408 Vol 1 Auth. Page 1 Issued: 2009-07-05
Revised: 2012-08-13

FOLLOW-UP SERVICE PROCEDURE
(TYPE R)

COMPONENT - FUSES, SUPPLEMENTAL
(JDYX2,JDYX8)
****
Complementary Product Category

Manufacturer: SEE ADDENDUM FOR MANUFACTURER LOCATIONS

1817204 (Party Site)
Applicant: SM HI-TECH CO LTD
(100517-358) 974-5 GOYEONRI UNGCHONMYON
ULJUGUN ULSAN 689-871 KOREA

1817204 (Party Site)
Recognized Company: SAME AS APPLICANT
(100517-358)

This Follow-Up Service Procedure authorizes the above Manufacturer(s) to use the marking specified by UL LLC, or any authorized licensee of UL LLC, including the UL Contracting Party, only on products when constructed, tested and found to be in compliance with the requirements of this Follow-Up Service Procedure and in accordance with the terms of the applicable service agreement with UL Contracting Party and any applicable Service Terms. The UL Contracting Party for Follow-Up Services is listed on addendum to this Follow-Up Service Procedure ("UL Contracting Party"). UL Contracting Party and UL LLC are referred to jointly herein as "UL."

UL further defines responsibilities, duties and requirements for both Manufacturers and UL representatives in the document titled, "UL Mark Surveillance Requirements" that can be located at the following web-site: http://www.ul.com/fus and in the document titled "UL and Subscriber Responsibilities" that can be located at the following website: http://www.ul.com/responsibilities. Manufacturers without Internet access may obtain the current version of these documents from their local UL customer service representative or UL field representative. For assistance, or to obtain a paper copy of these documents or the applicable Service Terms, please contact UL's Customer Service at http://www.ul.com/global/eng/pages/corporate/contactus, select a location and enter your request, or call the number listed for that location.

The Applicant, the specified Manufacturer(s) and any Recognized Company in this Follow-Up Service Procedure must agree to receive Follow-Up Services from UL Contracting Party. If your applicable agreement is a Global Services Agreement ("GSA") with an effective date of January 1, 2012 or later and this Follow-Up Service Procedure is issued on or after that effective date, the Applicant, the specified Manufacturer(s) and any Recognized Company will be bound to a Service Agreement for Follow-Up Services upon the earliest by any Subscriber of use of the prescribed UL Mark, acceptance of the factory inspection, or payment of the Follow-Up Service fees which will incorporate such GSA, this Follow-Up Service Procedure and the Follow-Up Service Terms which can be accessed by clicking here: http://www.ul.com/contracts/Terms-After-12-31-2011. In all other events, Follow-Up Services will be governed by and incorporate the terms of your applicable service agreement and this Follow-Up Service Procedure.

ONLINE CERTIFICATIONS DIRECTORY

Home Quick Guide Contact Us UL.com

JDYX2.E328408
Fuses, Supplemental - Component

Page Bottom

Fuses, Supplemental - Component

See General Information for Fuses, Supplemental - Component

SM HI-TECH CO LTD E328408
374-5 GOYEONRI UNGCHONMYON
ULJUGUN, ULSAN 689-871 REPUBLIC OF KOREA

Cat. No.	Size	Amps	V ac/dc	Interrupting Rating (A)
N-1206 TC, N-1206 TD, N-1206 TE, N-1206 TF;N-1206 FC, N-1206 FD, N-1206 FE, N-1206 FF	1.6 x 3.2 x 0.8	0.5-1.25	63 V dc	50
N-1206 TG, N-1206 TH, N-1206 TI, N-1206 TJ, N-1206 TK; N-1206 TL, N-1206 TM, N-1206 TO; N-1206 FG, N-1206 FH, N-1206 FI, N-1206 FJ, N-1206 FK; N-1206 FL, N-1206 FM, N-1206 FO	1.6 x 3.2 x 0.8	1.5-5	32 V dc	35
N-1206 CE, N-1206 CG, N-1206 CI, N-1206 CJ, N-1206 CK, N-1206 CL, N-1206 CM, N-1206 CN, N-1206 CO, N-1206 CP, N-1206 AE, N-1206 AG, N-1206 AI, N-1206 AJ, N-1206 AK, N-1206 AL, N-1206 AM, N-1206 AN, N-1206 AO	1.6 x 3.2 x 0.8	1 - 7	125/250Vac	35
N-0603 FD, N-0603 FE, N-0603 FF, N-0603 FG, N-0603 FH, N-0603 FI, N-0603 FJ, N-0603 FK, N-0603 FL, N-0603 FM, N-0603 FN, N-0603 FO, N-0603 FP, N-0603 FQ	1.6 x 0.8 x 0.5	0.75-5	32/63 Vdc	35
N-0603 TD, N-0603 TE, N-0603 TF, N-0603 TG, N-0603 TH, N-0603 TI, N-0603 TJ, N-0603 TK, N-0603 TL, N-0603 TM, N-0603 TN, N-0603 TO	1.6 x 0.8 x 0.5	0.75-4.0	32/63 Vdc	35
N-6125 AE, N-6125 AI, N-6125 AK, N-6125 AM, N-6125 AO	6.1 x 2.5x 0.8	1 - 4	125/250 Vac	35
N-6125 CE, N-6125 CG, N-6125 CI, N-6125 CJ, N-6125 CK, N-6125 CL, N-6125 CM, N-6125 CN, N-6125 CO	6.1 x 2.5 x 0.8	1-5	125/250 Vac	35
N-6125 HCP, N-6125 HCQ, N-6125 HCR	6.1 x 2.5 x 0.8	6.3-10	65/125 Vdc125 Vac	35
N-6125 HCS	6.1 x 2.5 x 0.8	12	65/125 Vdc125 Vac	50
N-4524 CE, N-4524 CG, N-4524 CI, N-4524 CJ, N-4524 CK,N-4524 CL, N-4524 CM, N-4524 CN, N-4524 CO, N-4524 AE, N-4524 AG, N-4524 AI, N-4524 AJ, N-4524 AK, N-4524 AL, N-4524 AM, N-4524 AN, N-4524 AO	4.5 x 2.4 x 0.8	1 - 5	125/250 Vac	35

Marking: Company name or catalog designation.

Last Updated on 2012-08-14

Questions? Print this page Terms of Use Page Top

● Certification (KC)

접 수 번 호 (Receipt No.) : 15-059284-15

전 기 용 품 안 전 인 증 서

Electrical Appliances Safety Certificate

안 전 인 증 번 호 (Certificate No.)	:	SG05002-14004A
제 조 업 자 명 (Manufacturer)	:	(주)에스엠하이테크
대 표 자 명 (President)	:	김종식
제조공장의 주소 (Factory Address)	:	울산광역시 울주군 웅촌면 웅촌로 585-36
제 품 명 (Product)	:	퓨즈(Universal Module fuse-links)
기 본 모 델 명 (Basic Model)	:	N-6125 CC 125
정 격 (Rating)	:	AC 125 V 0.5 A
파 생 모 델 명 (Series Model)	:	N-6125 CD 125
적 용 기 준 (Standard)	:	K60127-4(2008-12), K60127-1(2011-12)

「전기용품안전 관리법 시행규칙」 제6조제2항에 따라 위의 전기용품에 대하여 안전인증서를 발급합니다.

We issue Electrical Appliances Safety Certification as above product by Article 6 Section 2 of the Electrical Appliances Safety Control Law Enforcement Regulation.

2015 년 (Year) 11 월 (month) 18 일 (day)

ktl 한국산업기술시험원장
KOREA TESTING LABORATORY

※ 이 인증서는 「전기용품안전 관리법」에 따른 전기용품 안전성 확인에 한정된 것이며, 그 밖의 다른 법률이 적용되는 제품의 경우에는 해당 법률에 따라 추가로 인증·허가 등을 받아야 합니다.

첨 부 : (Annex)
1. 안전관리부품 및 재질목록 (List of Critical Components)
2. 기본모델·파생모델의 내용 (Descriptions of the basic and series model)
3. 전기용품안전인증의 변경 현황 (Revisions Status)

ktl
Korea Testing Laboratory

안전인증번호: SG05002-14004A
Certification No.

☐ 첨부 2 : 기본모델 · 파생모델의 내용
General description of Certified Products

파생모델명 Derivative model	기본모델과의 차이점 Differences between the basic and derivative model(s)
N-6125 CD 125	Rated current (0.75A) is different.

제품특기사항 및 시험조건 Remarks & Test conditions
1. 시험성적서검토서발행번호: 14-050381-04 KERI 시험성적서 번호 : 2014TS02542 2. 제품특기사항 - AC 125 V 0.5 A - Rated Breaking capacity : 50 A - Very fast-acting type - Standard sheet 4

□ 본 제품의 시험내용에 관하여 문의하실 사항이 있으시면 아래 연락처로 문의하시기 바랍니다.
시험담당자 : 디지털산업본부 정보조명평가센터 조인철 / (02)860-1425
□ *If you have any question on product testing, please contact the person below :*
Job holder : Smart Technology Division, IT & Lighting Testing Center, INCHUL CHO/+82 2 8601-425

FP511-09-00

☐ 첨부 3 : 전기용품안전인증의 변경 현황
Status of Certificate Revisions

변경발급 내용 Contents of Certificate Revisions
1차 변경) 제조자 주소 변경 (15-059284-15 : 2015.11.18.) - 변경 전 : 울산광역시 울주군 웅촌면 고연공단 1길 16 변경 후 : 울산광역시 울주군 웅촌면 웅촌로 585-36

FP511-11-00

접 수 번 호 (Receipt No.) : 15-059284-05

전 기 용 품 안 전 인 증 서

Electrical Appliances Safety Certificate

안 전 인 증 번 호 (Certificate No.)	:	SG05002-11004C
제 조 업 자 명 (Manufacturer)	:	(주)에스엠하이테크
대 표 자 명 (President)	:	김종식
제조공장의 주소 (Factory Address)	:	울산광역시 울주군 웅촌면 웅촌로 585-36
제 품 명 (Product)	:	퓨즈(유니버셜 모듈 퓨즈링크) (Fuse)
기 본 모 델 명 (Basic Model)	:	N-6125 Cl 125
정 격 (Rating)	:	AC 125 V 2 A
파 생 모 델 명 (Series Model)	:	첨부 2 참조
적 용 기 준 (Standard)	:	K60127-1(2011-12), K60127-4(2008-12)

「전기용품안전 관리법 시행규칙」 제6조제2항에 따라 위의 전기용품에 대하여 안전인증서를 발급합니다.

We Issue Electrical Appliances Safety Certification as above product by Article 6 Section 2 of the Electrical Appliances Safety Control Law Enforcement Regulation.

2015 년 (Year) 11 월 (month) 17 일 (day)

ktl 한국산업기술시험원장
KOREA TESTING LABORATORY

※ 이 인증서는 「전기용품안전 관리법」에 따른 전기용품 안전성 확인에 관한 것이며, 그 밖의 다른 법률이 적용되는 제품의 경우에는 해당 법률에 따라 추가로 인증·허가 등을 받아야 합니다.

첨 부 : (Annex)
1. 안전관리부품 및 재질목록 (List of Critical Components)
2. 기본모델·파생모델의 내용 (Descriptions of the basic and series model)
3. 전기용품안전인증의 변경 현황 (Revisions Status)

ktl
Korea Testing Laboratory

안전인증번호: SG05002-11004C
Certification No.

□ 첨부 2 : 기본모델 · 파생모델의 내용
General description of Certified Products

파생모델명 Derivative model	기본모델과의 차이점 Differences between the basic and derivative model(s)
N-6125 CE 125	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (125 V 1 A 50 A)
N-6125 CG 125	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (125 V 1.5 A 50 A)
N-6125 CJ 125	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (125 V 2.5 A 50 A)
N-6125 CF 125	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (AC 125 V 1.25 A 50 A)
N-6125 CG1 125	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (AC 125 V 1.6 A 50 A)
N-6125 CH 125	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (AC 125 V 1.75 A 50 A)

제품특기사항 및 시험조건
Remarks & Test conditions

1. 시험성적서 발행번호 : 11-1920-1033 (2011.03.22.)

2. 제품특기사항

- 퓨즈(유니버셜 모듈 퓨즈링크)
- 125 V 2 A
- 정격차단용량 : 50 A
- 에폭시케이스 안에 Solder, 가용체 등으로 구성됨
- 인쇄회로기판(PCB)에 고정시켜 사용하는 구조임

□ 본 제품의 시험내용에 관하여 문의하실 사항이 있으시면 아래 연락처로 문의하시기 바랍니다.
시험담당자 : 디지털산업본부 정보조명평가센터 조인철 / (02)860-1425
□ *If you have any question on product testing, please contact the person below :*
Job holder : Smart Technology Division, IT & Lighting Testing Center, INCHUL CHO/+82 2 8601-425

FP511-09-00

접 수 번 호 (Receipt No.) : 15-059284-22

전 기 용 품 안 전 인 증 서

Electrical Appliances Safety Certificate

안 전 인 증 번 호 (Certificate No.)	:	SG05002-110038
제 조 업 자 명 (Manufacturer)	:	(주)에스엠하이테크
대 표 자 명 (President)	:	김종식
제조공장의 주소 (Factory Address)	:	울산광역시 울주군 웅촌면 웅촌로 585-36
제 품 명 (Product)	:	퓨즈(Universal Module fuse-links)
기 본 모 델 명 (Basic Model)	:	N-6125 CM 125
정 격 (Rating)	:	AC125V, 4A, 50A
파 생 모 델 명 (Series Model)	:	첨부 2 참조
적 용 기 준 (Standard)	:	K60127-1(2011-12), K60127-4(2008-12)

「전기용품안전 관리법 시행규칙」 제6조제2항에 따라 위의 전기용품에 대하여 안전인증서를 발급합니다.

We Issue Electrical Appliances Safety Certification as above product by Article 6 Section 2 of the Electrical Appliances Safety Control Law Enforcement Regulation.

2015 년 (Year) 11 월 (month) 18 일 (day)

ktl 한국산업기술시험원장
KOREA TESTING LABORATORY

※ 이 인증서는 「전기용품안전 관리법」에 따른 전기용품 안전성 확인에 한정된 것이며, 그 밖의 다른 법률이 적용되는 제품의 경우에는 해당 법률에 따라 추가로 인증·허가 등을 받아야 합니다.

첨 부 : (Annex)
1. 안전관리부품 및 재질목록 (List of Critical Components)
2. 기본모델 · 파생모델의 내용 (Descriptions of the basic and series model)
3. 전기용품안전인증의 변경 현황 (Revisions Status)

ktl
Korea Testing Laboratory

안전인증번호: SG05002-11003B
Certification No.

□ 첨부 2 : 기본모델 · 파생모델의 내용
General description of Certified Products

파생모델명 Derivative model	기본모델과의 차이점 Differences between the basic and derivative model(s)
N-6125 CK 125	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (125 V 3 A 50 A)
N-6125 CL 125	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (125 V 3.5 A 50 A)
N-6125 CN 125	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (125 V 4.5 A 50 A)
N-6125 CO 125	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (125 V 5 A 50 A)
N-6125 CK1 125	*기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함* *(125 V 3.15 A 50 A)*
제품특기사항 및 시험조건 Remarks & Test conditions	

1. 시험성적서 발행번호 : 11-1920-1032 (2011.03.22.)

2. 제품특기사항
   - 퓨즈(유니버설 모듈 퓨즈링크)
   - 125 V 4 A
   - 정격차단용량 : 50 A
   - 에폭시케이스 안에 Solder, 가용체 등으로 구성됨
   - 인쇄회로기판(PCB)에 고정시켜 사용하는 구조임

□ 본 제품의 시험내용에 관하여 문의하실 사항이 있으시면 아래 연락처로 문의하시기 바랍니다.
시험담당자: 디지털산업본부 디지털남부사업센터 임화준 / (055) 791-3431
□ *If you have any question on product testing, please contact the person below :*
Job holder : Lighting Appliances & Electrical Components Testing Center H.J Rim /+82 55 791-3431

FP511-09-00

접 수 번 호 (Receipt No.) : 15-059284-14

전 기 용 품 안 전 인 증 서

Electrical Appliances Safety Certificate

안 전 인 증 번 호 (Certificate No.)	:	SG05002-14003A
제 조 업 자 명 (Manufacturer)	:	(주)에스엠하이테크
대 표 자 명 (President)	:	김종식
제조공장의 주소 (Factory Address)	:	울산광역시 울주군 웅촌면 웅촌로 585-36
제 품 명 (Product)	:	퓨즈(Universal Module fuse-links)
기 본 모 델 명 (Basic Model)	:	N-6125 CC 250
정 격 (Rating)	:	AC 250 V 0.5 A
파 생 모 델 명 (Series Model)	:	N-6125 CD 250
적 용 기 준 (Standard)	:	K60127-4(2008-12), K60127-1(2011-12)

「전기용품안전 관리법 시행규칙」 제6조제2항에 따라 위의 전기용품에 대하여 안전인증서를 발급합니다.

We Issue Electrical Appliances Safety Certification as above product by Article 6 Section 2 of the Electrical Appliances Safety Control Law Enforcement Regulation.

2015 년 (Year) 11 월 (month) 18 일 (day)

ktl 한국산업기술시험원장
KOREA TESTING LABORATORY

※ 이 인증서는 「전기용품안전 관리법」에 따른 전기용품 안전성 확인에 한정된 것이며, 그 밖의 다른 법률이 적용되는 제품의 경우에는 해당 법률에 따라 추가로 인증·허가 등을 받아야 합니다.

첨 부 : (Annex)

1. 안전관리부품 및 재질목록 (List of Critical Components)
2. 기본모델 · 파생모델의 내용 (Descriptions of the basic and series model)
3. 전기용품안전인증의 변경 현황 (Revisions Status)

ktl
Korea Testing Laboratory

안전인증번호: SG05002-14003A
Certification No.

☐ 첨부 2 : 기본모델 · 파생모델의 내용
General description of Certified Products

파생모델명 Derivative model	기본모델과의 차이점 Differences between the basic and derivative model(s)
N-6125 CD 250	Rated current (0.75A) is different.

제품특기사항 및 시험조건
Remarks & Test conditions

1. 시험성적서검토서발행번호: 14-050381-03
KERI 시험성적서 번호: 2014TS02543

2. 제품특기사항
- AC 250 V 0.5 A
- Rated Breaking capacity : 100 A
- Very fast-acting type
- Standard sheet 4

□ 본 제품의 시험내용에 관하여 문의하실 사항이 있으시면 아래 연락처로 문의하시기 바랍니다.
시험담당자 : 디지털산업본부 정보조명평가센터 조인철 / (02)860-1425
□ *If you have any question on product testing, please contact the person below :*
Job holder : Smart Technology Division, IT & Lighting Testing Center, INCHUL CHO/+82 2 8601-425

FP511-09-00

☐ 첨부 3 : 전기용품안전인증의 변경 현황
Status of Certificate Revisions

변경발급 내용 Contents of Certificate Revisions
1차 변경) 제조자 주소 변경 (15-059284-14 : 2015.11.18.) - 변경 전 : 울산광역시 울주군 웅촌면 고연공단 1길 16 변경 후 : 울산광역시 울주군 웅촌면 웅촌로 585-36

FP511-11-00

접 수 번 호 (Receipt No.) : 15-059284-04

전 기 용 품 안 전 인 증 서

Electrical Appliances Safety Certificate

안 전 인 증 번 호 (Certificate No.)	:	SG05002-11002C
제 조 업 자 명 (Manufacturer)	:	(주)에스엠하이테크
대 표 자 명 (President)	:	김종식
제조공장의 주소 (Factory Address)	:	울산광역시 울주군 웅촌면 웅촌로 585-36
제 품 명 (Product)	:	퓨즈(유니버설 모듈 퓨즈링크) (Fuse)
기 본 모 델 명 (Basic Model)	:	N-6125 CI 250
정 격 (Rating)	:	AC 250 V 2 A
파 생 모 델 명 (Series Model)	:	첨부 2 참조
적 용 기 준 (Standard)	:	K60127-1(2011-12), K60127-4(2008-12)

「전기용품안전 관리법 시행규칙」 제6조제2항에 따라 위의 전기용품에 대하여 안전인증서를 발급합니다.

We Issue Electrical Appliances Safety Certification as above product by Article 6 Section 2 of the Electrical Appliances Safety Control Law Enforcement Regulation.

2015 년 (Year) 11 월 (month) 17 일 (day)

ktl 한국산업기술시험원장
KOREA TESTING LABORATORY

※ 이 인증서는 「전기용품안전 관리법」에 따른 전기용품 안전성 확인에 한정된 것이며, 그 밖의 다른 법률이 적용되는 제품의 경우에는 해당 법률에 따라 추가로 인증·허가 등을 받아야 합니다.

첨 부 : (Annex)

1. 안전관리부품 및 재질목록 (List of Critical Components)
2. 기본모델·파생모델의 내용 (Descriptions of the basic and series model)
3. 전기용품안전인증의 변경 현황 (Revisions Status)

ktl
Korea Testing Laboratory

안전인증번호: SG05002-11002C
Certification No.

□ 첨부 2 : 기본모델 · 파생모델의 내용
General description of Certified Products

파생모델명 Derivative model	기본모델과의 차이점 Differences between the basic and derivative model(s)
N-6125 CE 250	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (250 V 1 A 100 A)
N-6125 CG 250	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (250 V 1.5 A 100 A)
N-6125 CJ 250	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (250 V 2.5 A 100 A)
N-6125 CF 250	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (AC 250 V 1.25 A 100 A)
N-6125 CG1 250	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (AC 250 V 1.6 A 100 A)
N-6125 CH 250	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (AC 250 V 1.75 A 100 A)

제품특기사항 및 시험조건
Remarks & Test conditions

1. 시험성적서 발행번호 : 11-1920-1031 (2011.03.22.)

2. 제품특기사항
   - 퓨즈(유니버설 모듈 퓨즈링크)
   - AC 250 V 2 A
   - 정격차단용량 : 100 A
   - 에폭시케이스 안에 Solder, 가용체 등으로 구성됨
   - 인쇄회로기판(PCB)에 고정시켜 사용하는 구조임

□ 본 제품의 시험내용에 관하여 문의하실 사항이 있으시면 아래 연락처로 문의하시기 바랍니다.
시험담당자 : 디지털산업본부 정보조명평가센터 조인철 / (02)860-1425
□ *If you have any question on product testing, please contact the person below :*
Job holder : Smart Technology Division, IT & Lighting Testing Center, INCHUL CHO/+82 2 8601-425

FP511-09-00

접 수 번 호 (Receipt No.) : 15-059284-21

전 기 용 품 안 전 인 증 서

Electrical Appliances Safety Certificate

안 전 인 증 번 호 (Certificate No.)	:	SG05002-11001B
제 조 업 자 명 (Manufacturer)	:	(주)에스엠하이테크
대 표 자 명 (President)	:	김종식
제조공장의 주소 (Factory Address)	:	울산광역시 울주군 웅촌면 웅촌로 585-36
제 품 명 (Product)	:	퓨즈(Universal Module fuse-links)
기 본 모 델 명 (Basic Model)	:	N-6125 CM 250
정 격 (Rating)	:	AC250V, 4A, 100A
파 생 모 델 명 (Series Model)	:	첨부 2 참조
적 용 기 준 (Standard)	:	K60127-1(2011-12), K60127-4(2008-12)

「전기용품안전 관리법 시행규칙」 제6조제2항에 따라 위의 전기용품에 대하여 안전인증서를 발급합니다.

We Issue Electrical Appliances Safety Certification as above product by Article 6 Section 2 of the Electrical Appliances Safety Control Law Enforcement Regulation.

2015 년 (Year) 11 월 (month) 18 일 (day)

ktl 한국산업기술시험원장
KOREA TESTING LABORATORY

※ 이 인증서는 「전기용품안전 관리법」에 따른 전기용품 안전성 확인에 한정된 것이며, 그 밖의 다른 법률이 적용되는 제품의 경우에는 해당 법률에 따라 추가로 인증·허가 등을 받아야 합니다.

첨 부 : (Annex)

1. 안전관리부품 및 재질목록 (List of Critical Components)
2. 기본모델·파생모델의 내용 (Descriptions of the basic and series model)
3. 전기용품안전인증의 변경 현황 (Revisions Status)

ktl
Korea Testing Laboratory

안전인증번호: SG05002-11001B
Certification No.

□ 첨부 2 : 기본모델 · 파생모델의 내용
General description of Certified Products

파생모델명 Derivative model	기본모델과의 차이점 Differences between the basic and derivative model(s)
N-6125 CK 250	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (250 V 3 A 100 A)
N-6125 CL 250	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (250 V 3.5 A 100 A)
N-6125 CN 250	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (250 V 4.5 A 100 A)
N-6125 CO 250	기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함 (250 V 5 A 100 A)
N-6125 CK1 250	*기본모델과 구조 및 특성은 동일하고, 모델명 및 정격전류가 상이함* *(250 V 3.15 A 100 A)*

제품특기사항 및 시험조건
Remarks & Test conditions

1. 시험성적서 발행번호 : 11-1920-1030 (2011.03.22.)

2. 제품특기사항
   - 퓨즈(유니버셜 모듈 퓨즈링크)
   - 250 V 4 A
   - 정격차단용량 : 100 A
   - 에폭시케이스 안에 Solder, 가용체 등으로 구성됨
   - 인쇄회로기판(PCB)에 고정시켜 사용하는 구조임

□ 본 제품의 시험내용에 관하여 문의하실 사항이 있으시면 아래 연락처로 문의하시기 바랍니다.
시험담당자: 디지털산업본부 디지털남부사업센터 임화준 / (055) 791-3431
□ *If you have any question on product testing, please contact the person below :*
Job holder : Lighting Appliances & Electrical Components Testing Center H.J Rim /+82 55 791-3431

FP511-09-00

● Certification (RoHS), (Halogen Free-Br, Cl)

SGS

Test Report No. F690101/LF-CTSAYGU15-04571 Issued Date : 2015. 07. 09 Page 1 of 6

SM HI-TECH CO., LTD.
16 Goyeongongdan1-gil,Ungchon-myun
Ulju-gun,Ulsan
Korea

The following sample(s) was/were submitted and identified by/on behalf of the client as:-

SGS File No.	: AYGU15-04571
Product Name	: SMD FUSE
Item No./Part No.	: N/A
Received Date	: 2015. 07. 06
Test Period	: 2015. 07. 06 to 2015. 07. 09
Test Comments	: By the applicant's specific request, the sampling and testing was performed only for the part indicated in the photo without disassembly.
Test Results	: For further details, please refer to following page(s)

SGS Korea Co., Ltd.
/ Gimhae Laboratory

Thomas Hwang / Lab Manager

SGS

Test Report No. F690101/LF-CTSAYGU15-04571

Issued Date : 2015. 07. 09

Sample No. : AYGU15-04571.001
Sample Description : SMD FUSE
Item No./Part No. : N/A
Materials : FR4 PCB, EPOXY RESIN, COPPER WIRE

Heavy Metals

Test Items	Unit	Test Method	MDL	Results
Cadmium (Cd)	mg/kg	With reference to IEC 62321-5:2013(Determination of Cadmium by ICP-OES)	0.5	N.D.
Lead (Pb)	mg/kg	With reference to IEC 62321-5:2013(Determination of Lead by ICP-OES)	5	N.D.
Mercury (Hg)	mg/kg	With reference to IEC 62321-4:2013(Determination of Mercury by ICP-OES)	2	N.D.
Hexavalent Chromium (Cr VI)	mg/kg	with reference to IEC 62321:2008 (Determination of Hexavalent Chromium by spot test/Colorimetric Method using UV-Vis)	1	N.D.
Antimony (Sb)	mg/kg	With reference to EPA 3052(1996), US EPA 6010B(1996), ICP	10	N.D.

Flame Retardants-PBBs/PBDEs

Test Items	Unit	Test Method	MDL	Results
Monobromobiphenyl	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Dibromobiphenyl	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Tribromobiphenyl	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Tetrabromobiphenyl	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Pentabromobiphenyl	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Hexabromobiphenyl	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Heptabromobiphenyl	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Octabromobiphenyl	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Nonabromobiphenyl	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Decabromobiphenyl	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Monobromodiphenyl ether	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Dibromodiphenyl ether	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.

SGS

Test Report No. F690101/LF-CTSAYGU15-04571

Issued Date : 2015. 07. 09

Sample No. : AYGU15-04571.001
Sample Description : SMD FUSE
Item No./Part No. : N/A
Materials : FR4 PCB, EPOXY RESIN, COPPER WIRE

Flame Retardants-PBBs/PBDEs

Test Items	Unit	Test Method	MDL	Results
Tribromodiphenyl ether	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Tetrabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Pentabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Hexabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Heptabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Octabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Nonabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.
Decabromodiphenyl ether	mg/kg	With reference to IEC 62321:2008 (Determination of PBBs and PBDEs by GC-MS)	5	N.D.

Halogen Contents

Test Items	Unit	Test Method	MDL	Results
Bromine(Br)	mg/kg	EN 14582:2007 , IC	30	N.D.
Chlorine(Cl)	mg/kg	EN 14582:2007 , IC	30	291

NOTE:
(1) N.D. = Not detected.(<MDL)
(2) mg/kg = ppm
(3) MDL = Method Detection Limit
(4) - = No regulation
(5) Negative = Undetectable / Positive = Detectable
(6) ** = Qualitative analysis (No Unit)
(7) * = Boiling-water-extraction:
Negative = Absence of CrVI coating
Positive = Presence of CrVI coating; the detected concentration in boiling-water-extraction solution is equal or greater than 0.02 mg/kg with 50 cm2 sample surface area.

SGS

Test Report No. F690101/LF-CTSAYGU15-04571 Issued Date : 2015. 07. 09 Page 4 of 6

Picture of Sample as Received:

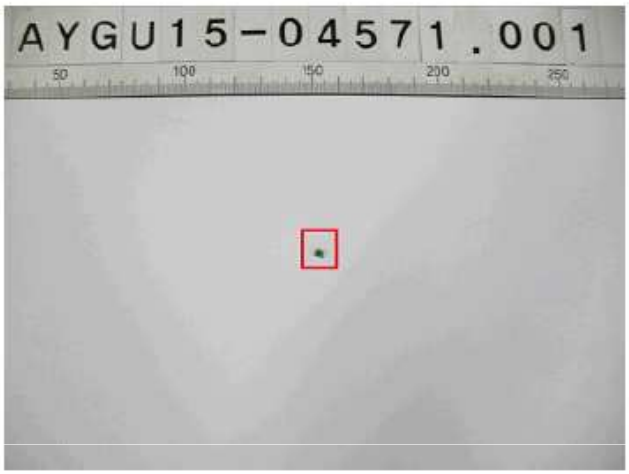

SGS

Test Report No. F690101/LF-CTSAYGU15-04571 Issued Date : 2015. 07. 09

Testing Flow Chart for RoHS:Cd/Pb/Hg/Cr^{6+} /PBBs&PBDEs Testing

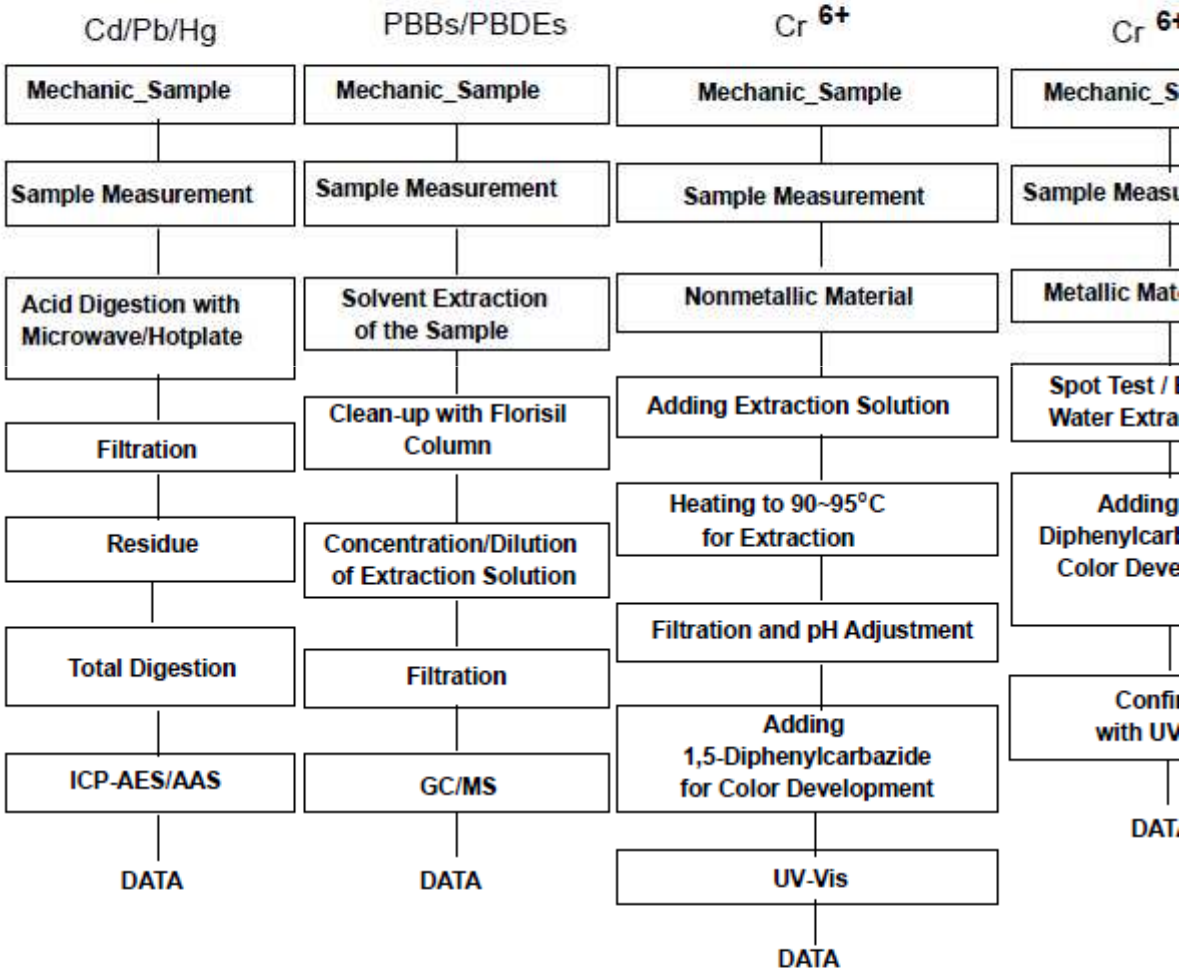

The samples were dissolved totally by pre-conditioning method according to above flow chart for Cd,Pb,Hg.

Section Chief : Shapless Park

SGS

Test Report No. F690101/LF-CTSAYGU15-04571 Issued Date : 2015. 07. 09

Flow Chart for Halogen Test

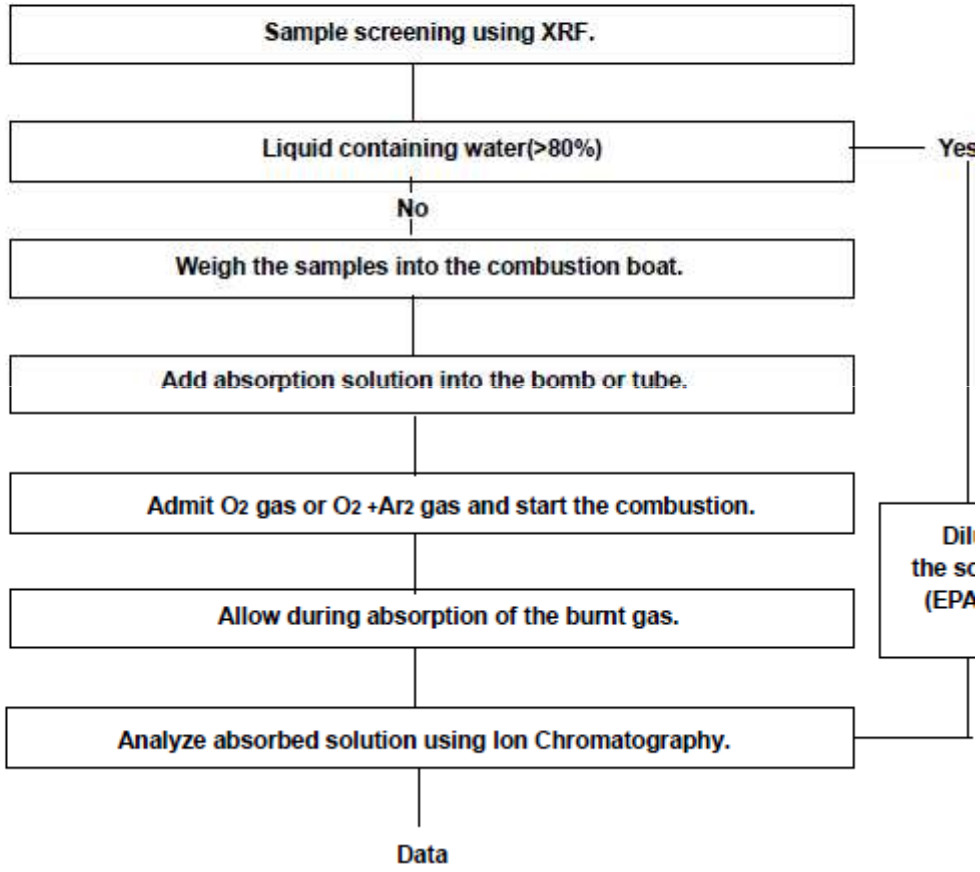

*** End of Report ***

● Certification (REACH)

SGS

Test Report **No. F690101/LF-CTSAYGU15-04572** Issued Date: 2015. 07. 13 Page 1 of 20

SM HI-TECH CO., LTD.
16 Goyeongongdan1-gil,Ungchon-myun
Ulju-gun,Ulsan
Korea

The following sample(s) was/were submitted and identified by/on behalf of the client as:-

SGS File No.	:	AYGU15-04572
Product Name	:	SMD FUSE
Item/Part Name	:	N/A
Received Date	:	2015. 07. 06
Test Period	:	2015. 07. 06 ~ 2015. 07. 13
Test Requested	:	One hundred-Sixty One (161) substances in the Candidate List of Substances of Very High Concern (SVHC) for authorization published by European Chemicals Agency (ECHA) on December 17, 2014 regarding Regulation (EC) No 1907/2006 concerning the REACH. Two(2) substances in the Public Consultation List of potential Substances of Very High Concern (SVHC) published by European Chemicals Agency (ECHA) on March 2, 2015 regarding Regulation (EC) No 1907/2006 concerning the REACH.
Test Method	:	Please refer to next page(s).
Test Result(s)	:	Please refer to next page(s).
Summary	:	According to the specified scope and analytical technique, concentrations of all SVHC are <0.1% in the submitted sample(s).

SGS Korea Co., Ltd
/Gimhae Laboratory

Thomas Hwang / Gimhae Lab Mgr.

Test Method:

SGS In-House method - Analyzed by ICP-OES, PLM, UV/VIS, LC/MS ,GC/MS and colorimetric method

Remarks:

1. The chemical analysis of specified SVHC is performed by means of currently available analytical techniques against the following SVHC related documents published by ECHA:
   http://echa.europa.eu/web/guest/candidate-list-table (Candidate list)
   http://echa.europa.eu/proposals-to-identify-substances-of-very-high-concern-previous-consultations?p_p_id=substancetypelist_WAR_substanceportlet&p_p_lifecycle=0&p_p_state=normal&p_p_mode=view&p_p_col_id=column-1&p_p_col_pos=2&p_p_col_count=4&_substancetypelis
   (Proposals to identify SVHC consulations)
   This list is under evaluation by ECHA and may subject to change in the future.
2. In accordance with Regulation (EC) No 1907/2006, any producer or importer of articles shall notify ECHA, in accordance with paragraph 2 of Article 7, if a substance meets the criteria in Article 57 and is identified in accordance with Article 59(1) of the Regulation, if (a) the substance is present in those articles in quantities totaling over one tonne per producer or importer per year; and (b) the substance is present in those articles above a concentration of **0.1** % weight by weight (w/w).
3. Article 33 of Regulation (EC) No 1907/2006 requires supplier of an article containing a substance meeting the criteria in Article 57 and identified in accordance with Article 59(1) in a concentration above **0.1** % weight by weight (w/w) shall provide the recipient of the article with sufficient information, available to the supplier, to allow safe use of the article including, as a minimum, the name of that substance in the Candidate List.
4. SGS adopts the interpretation of ECHA for SVHC in article unless indicated otherwise. Detail explanation is available at the following link:
   http://webstage.contribute.sgs.net/corpreach/documents/SGS-CTS_SVHC-paper-EN-11.pdf
5. Test results in this report are based on the tested sample. This report refers to testing result of composite material group by equal weight proportion. The material in each composite test group may come from one article.
6. If a SVHC is found over the reporting limit, client is suggested to identify the component which contains the SVHC and the exact concentration of the SVHC by requesting further quantitative analysis from the laboratory.

SGS

Test Report No. F690101/LF-CTSAYGU15-04572 Issued Date: 2015. 07. 13 Page 3 of 20

Test Result(s)

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Alkanes, C10-13, chloro (Short Chain Chlorinated Paraffins)	85535-84-8	287-476-5	N.D.	0.05	PBT
Anthracene	120-12-7	204-371-1	N.D.	0.05	PBT
Benzyl butyl phthalate (BBP)	85-68-7	201-622-7	N.D.	0.05	Toxic for Reproduction
Bis(2-ethylhexyl)phthalate (DEHP)	117-81-7	204-211-0	N.D.	0.05	Toxic for Reproduction
Bis(tributyltin)oxide	56-35-9	200-268-0	N.D.	0.05	PBT
Cobalt dichloride*	7646-79-9	231-589-4	N.D.	0.005	Carcinogen Toxic for Reproduction
4,4-Diaminodiphenylmethane	101-77-9	202-974-4	N.D.	0.05	Carcinogen
Diarsenic pentaoxide*	1303-28-2	215-116-9	N.D.	0.005	Carcinogen
Diarsenic trioxide*	1327-53-3	215-481-4	N.D.	0.005	Carcinogen
Dibutyl phthalate (DBP)	84-74-2	201-557-4	N.D.	0.05	Toxic for Reproduction
Hexabromocyclododecane (HBCDD) and all major diastereoisomers identified (α-HBCDD, β-HBCDD, γ-HBCDD)	25637-99-4 3194-55-6 (134237-51-7, 134237-50-6, 134237-52-8)	247-148-4 221-695-9	N.D.	0.05	PBT
Lead hydrogen arsenate*	7784-40-9	232-064-2	N.D.	0.005	Carcinogen Toxic for Reproduction
Sodium dichromate* (Sodium dichromate, dehydrate)	10588-01-9 (7789-12-0)	234-190-3	N.D.	0.005	Carcinogen Mutagen Toxic for Reproduction
5-tert-butyl-2,4,6-trinitro-m-xylene (musk xylene)	81-15-2	201-329-4	N.D.	0.05	vPvB
Triethyl arsenate*	15606-95-8	427-700-2	N.D.	0.005	Carcinogen

SGS

Test Report No. F690101/LF-CTSAYGU15-04572 Issued Date: 2015. 07. 13 Page 4 of 20

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Di-isobutyl phthalate(DIBP)	84-69-5	201-553-2	N.D.	0.05	Toxic for Reproduction
2,4-Dinitrotoluene	121-14-2	204-450-0	N.D.	0.05	Carcinogen
Tris(2-chloroethyl) phosphate	115-96-8	204-118-5	N.D.	0.05	Toxic for Reproduction
Anthracene oil	90640-80-5	292-602-7	N.D.	0.05	PBT; vPvB Carcinogen
Anthracene oil, anthracene paste; distn. Lights	91995-17-4	295-278-5	N.D.	0.05	PBT; vPvB Carcinogen Mutagen
Anthracene oil, anthracene paste, anthracene fraction	91995-15-2	295-275-9	N.D.	0.05	PBT; vPvB Carcinogen Mutagen
Anthracene oil, anthracene-low	90640-82-7	292-604-8	N.D.	0.05	PBT; vPvB Carcinogen Mutagen
Anthracene oil, anthracene paste	90640-81-6	292-603-2	N.D.	0.05	PBT; vPvB Carcinogen Mutagen
Coal tar pitch, high temperature	65996-93-2	266-028-2	N.D.	0.05	PBT; vPvB Carcinogen
Lead sulfochromate yellow (C.I. Pigment Yellow 34)*	1344-37-2	215-693-7	N.D.	0.005	Carcinogen Toxic for Reproduction
Lead chromate molybdate sulfate red (C.I. Pigment Red 104)*	12656-85-8	235-759-9	N.D.	0.005	Carcinogen Toxic for Reproduction
Lead chromate*	7758-97-6	231-846-0	N.D.	0.005	Carcinogen Toxic for Reproduction
Acrylamide	79-06-01	201-173-7	N.D.	0.05	Carcinogen Mutagen

SGS

Test Report No. F690101/LF-CTSAYGU15-04572 Issued Date: 2015. 07. 13 Page 5 of 20

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Boric acid*	10043-35-3 11113-50-1	233-139-2 234-343-4	N.D.	0.005	Toxic for Reproduction
Disodium tetraborate, anhydrous*	1330-43-4 12179-04-3 1303-96-4	215-540-4	N.D.	0.005	Toxic for Reproduction
Tetraboron disodium heptaoxide, hydrate*	12267-73-1	235-541-3	N.D.	0.005	Toxic for Reproduction
Trichloroethylene	79-01-6	201-167-4	N.D.	0.05	Carcinogen
Sodium chromate*	7775-11-3	231-889-5	N.D.	0.005	Carcinogen Mutagen Toxic for Reproduction
Ammonium dichromate*	7789-09-5	232-143-1	N.D.	0.005	Carcinogen Mutagen Toxic for Reproduction
Potassium dichromate*	7778-50-9	231-906-6	N.D.	0.005	Carcinogen Mutagen Toxic for Reproduction
Potassium chromate*	7789-00-6	232-140-5	N.D.	0.005	Carcinogen Mutagen

SGS

Test Report No. F690101/LF-CTSAYGU15-04572 Issued Date: 2015. 07. 13 Page 6 of 20

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Cobalt(II) sulphate*	10124-43-3	233-334-2	N.D.	0.005	Carcinogen Toxic for Reproduction
Cobalt(II) dinitrate*	10141-05-6	233-402-1	N.D.	0.005	Carcinogen Toxic for Reproduction
Cobalt(II) carbonate*	513-79-1	208-169-4	N.D.	0.005	Carcinogen Toxic for Reproduction
Cobalt(II) diacetate*	71-48-7	200-755-8	N.D.	0.005	Carcinogen Toxic for Reproduction
2-Methoxyethanol	109-86-4	203-713-7	N.D.	0.05	Toxic for Reproduction
2-Ethoxyethanol	110-80-5	203-804-1	N.D.	0.05	Toxic for Reproduction
Chromium trioxide*	1333-82-0	215-607-8	N.D.	0.005	Carcinogen Mutagen
Acids generated from chromium trioxide and their oligomers: Chromic acid Dichromic acid Oligomers of chromic acid and dichromic acid*	 7738-94-5 13530-68-2 -	 231-801-5 236-881-5 -	N.D.	0.005	Carcinogen
1-methyl-2-pyrrolidone	872-50-4	212-828-1	N.D.	0.05	Toxic for Reproduction
2-ethoxyethyl acetate	111-15-9	203-839-2	N.D.	0.05	Toxic for Reproduction
1,2-benzenedicarboxylic acid, di-C6-8-branced alkyl esters, C7-rich	71888-89-6	276-158-1	N.D.	0.05	Toxic for Reproduction
1,2-benzenedicarboxylic acid, di-C7-11-branched and linear alkyl esters	68515-42-4	271-084-6	N.D.	0.05	Toxic for Reproduction
1,2,3-trichloropropane	96-18-4	202-486-1	N.D.	0.05	Carcinogen Toxic for Reproduction
Hydrazine	7803-57-8 302-01-2	206-114-9	N.D.	0.05	Carcinogen
Strontium chromate*	7789-06-2	232-142-6	N.D.	0.005	Carcinogen

SGS

Test Report No. F690101/LF-CTSAYGU15-04572 Issued Date: 2015. 07. 13 Page 7 of 20

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
1,2-Dichloroethane	107-06-2	203-458-1	N.D.	0.05	Carcinogenic
2,2'-dichloro-4,4'-methylenedianiline (MOCA)	101-14-4	202-918-9	N.D.	0.05	Carcinogenic
2-Methoxyaniline o-Anisidine	90-04-0	201-963-1	N.D.	0.05	Carcinogenic
4-(1,1,3,3-tetramethylbutyl) phenol, (4-tert-Octylphenol)	140-66-9	205-426-2	N.D.	0.05	Equivalent level of concern having probable serious effects to the environment
Aluminosilicate Refractory Ceramic Fibres* (RCF)	650-017-00-8 (Index no.)	-	N.D.	0.005	Carcinogenic
Arsenic acid*	7778-39-4	231-901-9	N.D.	0.005	Carcinogenic
Bis(2-methoxyethyl) ether	111-96-6	203-924-4	N.D.	0.05	Toxic for reproduction
Bis(2-methoxyethyl) phthalate	117-82-8	204-212-6-	N.D.	0.05	Toxic for reproduction
Calcium arsenate*	7778-44-1	231-904-5	N.D.	0.005	Carcinogenic
Dichromium tris(chromate)*	24613-89-6	246-356-2	N.D.	0.005	Carcinogenic
Formaldehyde, oligomeric reaction products with aniline (technical MDA)	25214-70-4	500-036-1	N.D.	0.05	Carcinogenic
Lead diazide*	13424-46-9	236-542-1	N.D.	0.005	Toxic for reproduction
Lead dipicrate*	6477-64-1	229-335-2	N.D.	0.005	Toxic for reproduction
Lead styphnate*	15245-44-0	239-290-2	N.D.	0.005	Toxic for reproduction
N,N-dimethylacetamide (DMAC)	127-19-5	204-826-4	N.D.	0.05	Toxic for reproduction
Pentazinc chromate octahydroxide*	49663-84-5	256-418-0	N.D.	0.005	Carcinogenic
Phenolphthalein	77-09-8	201-004-7	N.D.	0.05	Carcinogenic
Potassium hydroxyocta-oxodizincatedichromate*	11103-86-9	234-329-8	N.D.	0.005	Carcinogenic
Trilead diarsenate*	3687-31-8	222-979-5	N.D.	0.005	Carcinogenic Toxic for reproduction

SGS

Test Report No. F690101/LF-CTSAYGU15-04572 Issued Date: 2015. 07. 13 Page 8 of 20

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Zirconia Aluminosilicate Refractory Ceramic Fibres (Zr-RCF)*	650-017-00-8 (Index no.)	-	N.D.	0.005	Carcinogenic
1,2-bis(2-methoxyethoxy) ethane (TEGDME; triglyme)	112-49-2	203-977-3	N.D.	0.05	Toxic for reproduction
1,2-dimethoxyethane; ethylene glycol dimethyl ether (EGDME)	110-71-4	203-794-9	N.D.	0.05	Toxic for reproduction
Diboron trioxide*	1303-86-2	215-125-8	N.D.	0.005	Toxic for reproduction
Formamide	75-12-7	200-842-0	N.D.	0.05	Toxic for reproduction
Lead(II) bis(methanesulfonate)*	17570-76-2	401-750-5	N.D.	0.005	Toxic for reproduction
TGIC(1,3,5-tris (oxiranyl methyl)-1,3,5-triazine-2,4,6(1H,3H,5H)-trione)	2451-62-9	219-514-3	N.D.	0.05	Mutagenic
β-TGIC (1,3,5-tris[(2S and 2R)-2,3-epoxypropyl]-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione)**	59653-74-6	423-400-0	N.D.	0.05	Mutagenic
4,4'-bis(dimethylamino) benzophenone (Michler's ketone)	90-94-8	202-027-5	N.D.	0.05	Carcinogenic
N,N,N',N'-tetramethyl-4,4'-methylenedianiline (Michler's base)	101-61-1	202-959-2	N.D.	0.05	Carcinogenic
[4-[4,4'-bis(dimethylamino) benzhydrylidene]cyclohexa-2,5-dien-1-ylidene] dimethylammonium chloride (C.I. Basic Violet 3)	548-62-9	208-953-6	N.D.	0.05	Carcinogenic
[4-[[4-anilino-1-naphthyl][4-(dimethylamino)phenyl]methylene]cyclohexa-2,5-dien-1-ylidene] dimethylammonium chloride (C.I. Basic Blue 26)	2580-56-5	219-943-6	N.D.	0.05	Carcinogenic
α,α-Bis[4-(dimethylamino) phenyl]-4 (phenylamino) naphthalene-1-methanol (C.I. Solvent Blue 4)	6786-83-0	229-851-8	N.D.	0.05	Carcinogenic
4,4'-bis(dimethylamino)-4"-(methylamino)trityl alcohol	561-41-1	209-218-2	N.D.	0.05	Carcinogenic

SGS Korea Co., Ltd. 204, GBMC, 88 Bomang-gil, Juchon-myeon, Gimhae-si, Gyeongnam, Korea 621-842
t +82 (0)55 310 8801 f +82 (0)55 310 8809 http://www.sgsgroup.kr
Member of the SGS Group (Société Générale de Surveillance)

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Bis(pentabromophenyl) ether (DecaBDE)	1163-19-5	214-604-9	N.D.	0.05	PBT vPvB
Pentacosafluorotridecanoic acid	72629-94-8	276-745-2	N.D.	0.05	vPvB
Tricosafluorododecanoic acid	307-55-1	206-203-2	N.D.	0.05	vPvB
Henicosafluoroundecanoic acid	2058-94-8	218-165-4	N.D.	0.05	vPvB
Heptacosafluorotetradecanoic acid	376-06-7	206-803-4	N.D.	0.05	vPvB
4-(1,1,3,3-tetramethylbutyl) phenol, ethoxylated - covering well-defined substances and UVCB substances, polymers and homologues	-	-	N.D.	0.05	Equivalent level of concern - probable serious effects on the environment
4-Nonylphenol, branched and linear – substances with a linear and/or branched alkyl chain with a carbon number of 9 covalently bound in position 4 to phenol, covering also UVCB- and well-defined substances which include any of the individual isomers or a combination thereof	-	-	N.D.	0.05	Equivalent level of concern - probable serious effects on the environment
Diazene-1,2-dicarboxamide (C,C'-azodi(formamide))	123-77-3	204-650-8	N.D.	0.05	Equivalent level of concern - probable serious effects on human health
Cyclohexane-1,2-dicarboxylic anhydride (Hexahydrophthalic anhydride - HHPA)	85-42-7	201-604-9	N.D.	0.05	Equivalent level of concern - probable serious effects on human health

SGS

Test Report No. F690101/LF-CTSAYGU15-04572 Issued Date: 2015. 07. 13 Page 10 of 20

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Hexahydromethylphathalic anhydride, Hexahydro-4-methylphathalic anhydride, Hexahydro-1-methylphathalic anhydride, Hexahydro-3-methylphathalic anhydride	25550-51-0, 19438-60-9, 48122-14-1, 57110-29-9	247-094-1, 243-072-0, 256-356-4, 260-566-1	N.D.	0.05	Equivalent level of concern - probable serious effects on human health
Methoxy acetic acid	625-45-6	210-894-6	N.D.	0.05	Toxic for reproduction equivalent level of concern -probable serious effects on human health and the environment
1,2-Benzenedicarboxylic acid, dipentylester, branched and linear	84777-06-0	284-032-2	N.D.	0.05	Toxic for reproduction
Diisopentylphthalate (DIPP)	605-50-5	210-088-4	N.D.	0.05	Toxic for reproduction
N-pentyl-isopentylphtalate	-	-	N.D.	0.05	Toxic for reproduction
1,2-Diethoxyethane	629-14-1	211-076-1	N.D.	0.05	Toxic for reproduction
N,N-dimethylformamide; dimethyl formamide	68-12-2	200-679-5	N.D.	0.05	Toxic for reproduction
Dibutyltin dichloride (DBT)	683-18-1	211-670-0	N.D.	0.05	Toxic for reproduction
Acetic acid, lead salt, basic*	51404-69-4	257-175-3	N.D.	0.005	Toxic for reproduction
Basic lead carbonate (trilead bis(carbonate)dihydroxide)*	1319-46-6	215-290-6	N.D.	0.005	Toxic for reproduction
Lead oxide sulfate (basic lead sulfate)*	12036-76-9	234-853-7	N.D.	0.005	Toxic for reproduction
[Phthalato(2-)]dioxotrilead (dibasic lead phthalate)*	69011-06-9	273-688-5	N.D.	0.005	Toxic for reproduction

SGS

Test Report No. F690101/LF-CTSAYGU15-04572 Issued Date: 2015. 07. 13 Page 11 of 20

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Dioxobis(stearato)trilead*	12578-12-0	235-702-8	N.D.	0.005	Toxic for reproduction
Fatty acids, C16-18, lead salts*	91031-62-8	292-966-7	N.D.	0.005	Toxic for reproduction
Lead bis(tetrafluoroborate)*	13814-96-5	237-486-0	N.D.	0.005	Toxic for reproduction
Lead cyanamidate*	20837-86-9	244-073-9	N.D.	0.005	Toxic for reproduction
Lead dinitrate*	10099-74-8	233-245-9	N.D.	0.005	Toxic for reproduction
Lead oxide (lead monoxide)*	1317-36-8	215-267-0	N.D.	0.005	Toxic for reproduction
Lead tetroxide (orange lead)*	1314-41-6	215-235-6	N.D.	0.005	Toxic for reproduction
Lead titanium trioxide*	12060-00-3	235-038-9	N.D.	0.005	Toxic for reproduction
Lead Titanium Zirconium Oxide*	12626-81-2	235-727-4	N.D.	0.005	Toxic for reproduction
Pentalead tetraoxide sulphate*	12065-90-6	235-067-7	N.D.	0.005	Toxic for reproduction
Pyrochlore, antimony lead yellow*	8012-00-8	232-382-1	N.D.	0.005	Toxic for reproduction
Silicic acid, barium salt, lead-doped*	68784-75-8	272-271-5	N.D.	0.005	Toxic for reproduction
Silicic acid, lead salt*	11120-22-2	234-363-3	N.D.	0.005	Toxic for reproduction
Sulfurous acid, lead salt, dibasic*	62229-08-7	263-467-1	N.D.	0.005	Toxic for reproduction
Tetraethyllead*	78-00-2	201-075-4	N.D.	0.005	Toxic for reproduction
Tetralead trioxide sulphate*	12202-17-4	235-380-9	N.D.	0.005	Toxic for reproduction

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Trilead dioxide phosphonate*	12141-20-7	235-252-2	N.D.	0.005	Toxic for reproduction
Furan	110-00-9	203-727-3	N.D.	0.05	Carcinogenic
Propylene oxide; 1,2-epoxypropane; methyloxirane	75-56-9	200-879-2	N.D.	0.05	Carcinogenic Mutagenic
Diethyl sulphate	64-67-5	200-589-6	N.D.	0.05	Carcinogenic Mutagenic
Dimethyl sulphate	77-78-1	201-058-1	N.D.	0.05	Carcinogenic
3-ethyl-2-methyl-2-(3-methylbutyl)-1,3-oxazolidine	143860-04-2	421-150-7	N.D.	0.05	Toxic for reproduction
Dinoseb	88-85-7	201-861-7	N.D.	0.05	Toxic for reproduction
4,4'-methylenedi-o-toluidine	838-88-0	212-658-8	N.D.	0.05	Carcinogenic
4,4'-oxydianiline and its salts	101-80-4	202-977-0	N.D.	0.05	Carcinogenic Mutagenic
4-Aminoazobenzene; 4-Phenylazoaniline	60-09-3	200-453-6	N.D.	0.05	Carcinogenic
4-methyl-m-phenylenediamine (2,4-toluene-diamine)	95-80-7	202-453-1	N.D.	0.05	Carcinogenic
6-methoxy-m-toluidine (p-cresidine)	120-71-8	204-419-1	N.D.	0.05	Carcinogenic
Biphenyl-4-ylamine	92-67-1	202-177-1	N.D.	0.05	Carcinogenic
o-aminoazotoluene	97-56-3	202-591-2	N.D.	0.05	Carcinogenic
o-Toluidine; 2-Aminotoluene	95-53-4	202-429-0	N.D.	0.05	Carcinogenic
N-methylacetamide	79-16-3	201-182-6	N.D.	0.05	Toxic for reproduction
1-bromopropane; n-propyl bromide	106-94-5	203-445-0	N.D.	0.05	Toxic for reproduction

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Cadmium	7440-43-9	231-152-8	N.D.	0.005	Carcinogenic
Cadmium oxide*	1306-19-0	215-146-2	N.D.	0.005	Carcinogenic
Dipentyl phthalate (DPP)	131-18-0	205-017-9	N.D.	0.05	Toxic for reproduction
4-Nonylphenol, branched and linear, ethoxylated [substances with a linear and/or branched alkyl chain with a carbon number of 9 covalently bound in position 4 to phenol, ethoxylated covering UVCB- and well-defined substances, polymers and homologues, which include any of the individual isomers and/or combinations thereof]	-	-	N.D.	0.05	Equivalent level of concern having probable serious effects to the environment
Ammonium pentadecafluorooctanoate (APFO)	3825-26-1	223-320-4	N.D.	0.05	Toxic for reproduction
Pentadecafluorooctanoic acid (PFOA)	335-67-1	206-397-9	N.D.	0.05	Toxic for reproduction

SGS

Test Report No. F690101/LF-CTSAYGU15-04572 Issued Date: 2015. 07. 13 Page 14 of 20

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
Dihexyl phthalate	84-75-3	201-559-5	N.D.	0.05	Toxic for reproduction
Trixylyl phosphate	25155-23-1	246-677-8	N.D.	0.05	Toxic for reproduction
Imidazolidine-2-thione; 2-imidazoline-2-thiol	96-45-7	202-506-9	N.D.	0.05	Toxic for reproduction
Disodium 4-amino-3-[[4'-[(2,4-diaminophenyl)azo][1,1'-biphenyl]-4-yl]azo] -5-hydroxy-6-(phenylazo)naphthalene-2,7-disulphonate (C.I. Direct Black 38)	1937-37-7	217-710-3	N.D.	0.05	Carcinogenic
Disodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis(4-aminonaphthalene-1-sulphonate) (C.I. Direct Red 28)	573-58-0	209-358-4	N.D.	0.05	Carcinogenic
Cadmium sulphide*	1306-23-6	215-147-8	N.D.	0.005	Carcinogenic Equivalent level of concern having probable serious effects to human health
Lead di(acetate)*	301-04-2	206-104-4	N.D.	0.005	Toxic for reproduction

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
1,2-Benzenedicarboxylic acid, dihexyl ester, branched and linear	68515-50-4	271-093-5	N.D.	0.05	Toxic for reproduction
Cadmium chloride*	10108-64-2	233-296-7	N.D.	0.005	Carcinogenic Mutagenic Toxic for Reproduction Equivalent level of concern having probable serious effects to human health
Sodium perborate*; perboric acid, sodium salt*	-	239-172-9 234-390-0	N.D.	0.005	Toxic for reproduction
Sodium peroxometaborate*	7632-04-4	231-556-4	N.D.	0.005	Toxic for reproduction

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
2-benzotriazol-2-yl-4,6-di-tert-butylphenol (UV-320)	3846-71-7	223-346-6	N.D	0.05	PBT vPvB
2-(2H-benzotriazol-2-yl)-4,6-ditertpentylphenol (UV-328)	25973-55-1	247-384-8	N.D	0.05	PBT vPvB
2-ethylhexyl 10-ethyl-4,4-dioctyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate (DOTE)	15571-58-1	239-622-4	N.D	0.05	Toxic for Reproduction
Reaction mass of 2-ethylhexyl 10-ethyl-4,4-dioctyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate and 2-ethylhexyl 10-ethyl-4-[[2-[(2-ethylhexyl)oxy]-2-oxoethyl]thio]-4-octyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate (reaction mass of DOTE and MOTE)	-	-	N.D	0.05	Toxic for Reproduction
Cadmium fluoride	7790-79-6	232-222-0	N.D	0.005	Carcinogenic Mutagenic Toxic for Reproduction Equivalent level of concern having probable serious effects to human health
Cadmium sulphate	10124-36-4; 31119-53-6	233-331-6	N.D	0.005	Carcinogenic Mutagenic; Toxic for Reproduction Equivalent level of concern having probable serious effects to human health

Substance Name	CAS number	EC number	Concentration (%)	Reporting Limit (%)	Classification
1,2-benzenedicarboxylic acid, di-C6-10-alkyl esters; 1,2-benzenedicarboxylic acid, mixed decyl and hexyl and octyl diesters with ≥ 0.3% of dihexyl phthalate (EC No. 201-559-5)	68515-51-5 68648-93-1	271-094-0 272-013-1	N.D.	0.05	Toxic for Reproduction (Article 57 c)
5-sec-butyl-2-(2,4-dimethylcyclohex-3-en-1-yl)-5-methyl-1,3-dioxane [1], 5-sec-butyl-2-(4,6-dimethylcyclohex-3-en-1-yl)-5-methyl-1,3-dioxane [2] [covering any of the individual isomers of [1] and [2] or any combination thereof]	-	-	N.D.	0.05	vPvB (Article 57 e)

Note:

1. RL = Reporting Limit
2. N.D. = Not detected (lower than RL)

   N.A. = Not applicable for respective material type.

   The submitted sample was found to contain significant amount of specific element(s) of SVHC. Upon further test verification and also information provided from client, the possibility that the element(s) content originate from SVHC is very unlikely, even though their presence cannot be exclude entirely. It may be assumed that the detected element(s) have a non-SVHC source.
3. Definition of classification is listed in Appendix A of this report in accordance with 67/548/EEC and Regulation (EC) No 1907/2006. For detail information, Detail explanation is available at the following link:
   http://echa.europa.eu/web/quest/candidate-list-table (Candidate list)
   http://echa.europa.eu/proposals-to-identify-substances-of-very-high-concern-previous-consultations?p_p_id=substancetypelist_WAR_substanceportlet&p_p_lifecycle=0&p_p_state=normal&p_p_mode=view&p_p_col_id=column-1&p_p_col_pos=2&p_p_col_count=4&_substancetypelis
   (Proposals to identify SVHC consulations)
4. *.The test result is based on the calculation of selected element(s) / marker(s) and to the worst-case scenario. For detail information, please refer to the SGS REACH website: www.reach.sgs.com/substance-of-very-high-concern-analysis-information-page.htm

   The client is advised to review the chemical formulation to ascertain above metal substances present in the article. RL = 0.005% is evaluated for element (i.e. cobalt, arsenic, lead, sodium, chromium, chromium(VI), silicon, aluminum, zirconium, boron, and potassium respectively), except molybdenum RL=0.0005%

   0.1% (w/w) = 1,000 ppm = 1,000 mg/kg
5. **.β-TGIC is one of the isomers for TGIC compounds and hence, tested together. The reported test result is based the proposed ratio as according to ECHA dossier.

Picture of Sample as Received :

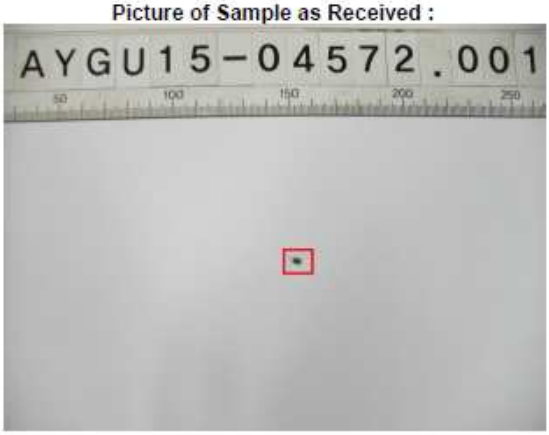

*** End of Report ***

Appendix A

Classification	Definition under 67/548/EEC and Regulation (EC) No 1907/2006
Carcinogen Category 1:	Substances known to be carcinogenic to man. There is sufficient evidence to establish a causal association between human exposure to a substance and the development of cancer.
Carcinogen Category 2:	Substances which should be regarded as if they are carcinogenic to man. There is sufficient evidence to provide a strong presumption that human exposure to a substance may result in the development of cancer. Generally on the basis of: - appropriate long-term animal studies - other relevant information.
Mutagen Category 1:	Substances known to be mutagenic to man. There is sufficient evidence to establish a causal association between human exposure to a substance and heritable genetic damage.
Mutagen Category 2:	Substances which should be regarded as if they are mutagenic to man. There is sufficient evidence to provide a strong presumption that human exposure to the substance may result in the development of heritable genetic damage, generally on the basis of: - appropriate animal studies, - other relevant information.
Toxic to Reproduction Category 1:	Substances known to impair fertility in humans. There is sufficient evidence to establish a causal relationship between human exposure to the substance and impaired fertility. Substances known to cause developmental toxicity in humans. There is sufficient evidence to establish a causal relationship between human exposure to the substance and subsequent developmental toxic effects in the progeny.
Toxic to Reproduction Category 2:	Substances which should be regarded as if they impair fertility in humans. There is sufficient evidence to provide a strong presumption that human exposure to the substance may result in impaired fertility on the basis of: - clear evidence in animal studies of impaired fertility in the absence of toxic effects, or, evidence of impaired fertility occurring at around the same dose levels as other toxic effects but which is not a secondary nonspecific consequence of the other toxic effects, - other relevant information. Substances which should be regarded as if they cause developmental toxicity to humans. There is sufficient evidence to provide a strong presumption that human exposure to the substance may result in developmental toxicity, generally on the basis of: - clear results in appropriate animal studies where effects have been observed in the absence of signs of marked maternal toxicity, or at around the same dose levels as other toxic effects but which are not a secondary non-specific consequence of the other toxic effects, - other relevant information.
PBT & vPvB:	Substances which are persistent, bioaccumulative and toxic (PBT) or very persistent and very bioaccumulative (vPvB) pose a particular challenge to the chemicals safety management. For these substances a "safe" concentration in the environment cannot be established with sufficient reliability.